

# Floating Base - Contents & Setup




**Prefer to watch a quick video?**

Scan this QR Code with your phone or go to [quokkabeds.com.au/assembly](https://quokkabeds.com.au/assembly)

You will receive:

- Frame (1 back, 1 front and 2 side rails)
- Set of slats
- Centrebeam/s depending on size
- Crossbeam
- Small Screws x4 + Small Allen Key (or 8x screws for beds with HB)
- Large Screws x2 + Large Allen Key
- Loose Rubber Pads x2
- Sticky Rubber Pads x6
- + Headboard and struts (if ordered)

We suggest first laying out the pieces roughly where they should end up:

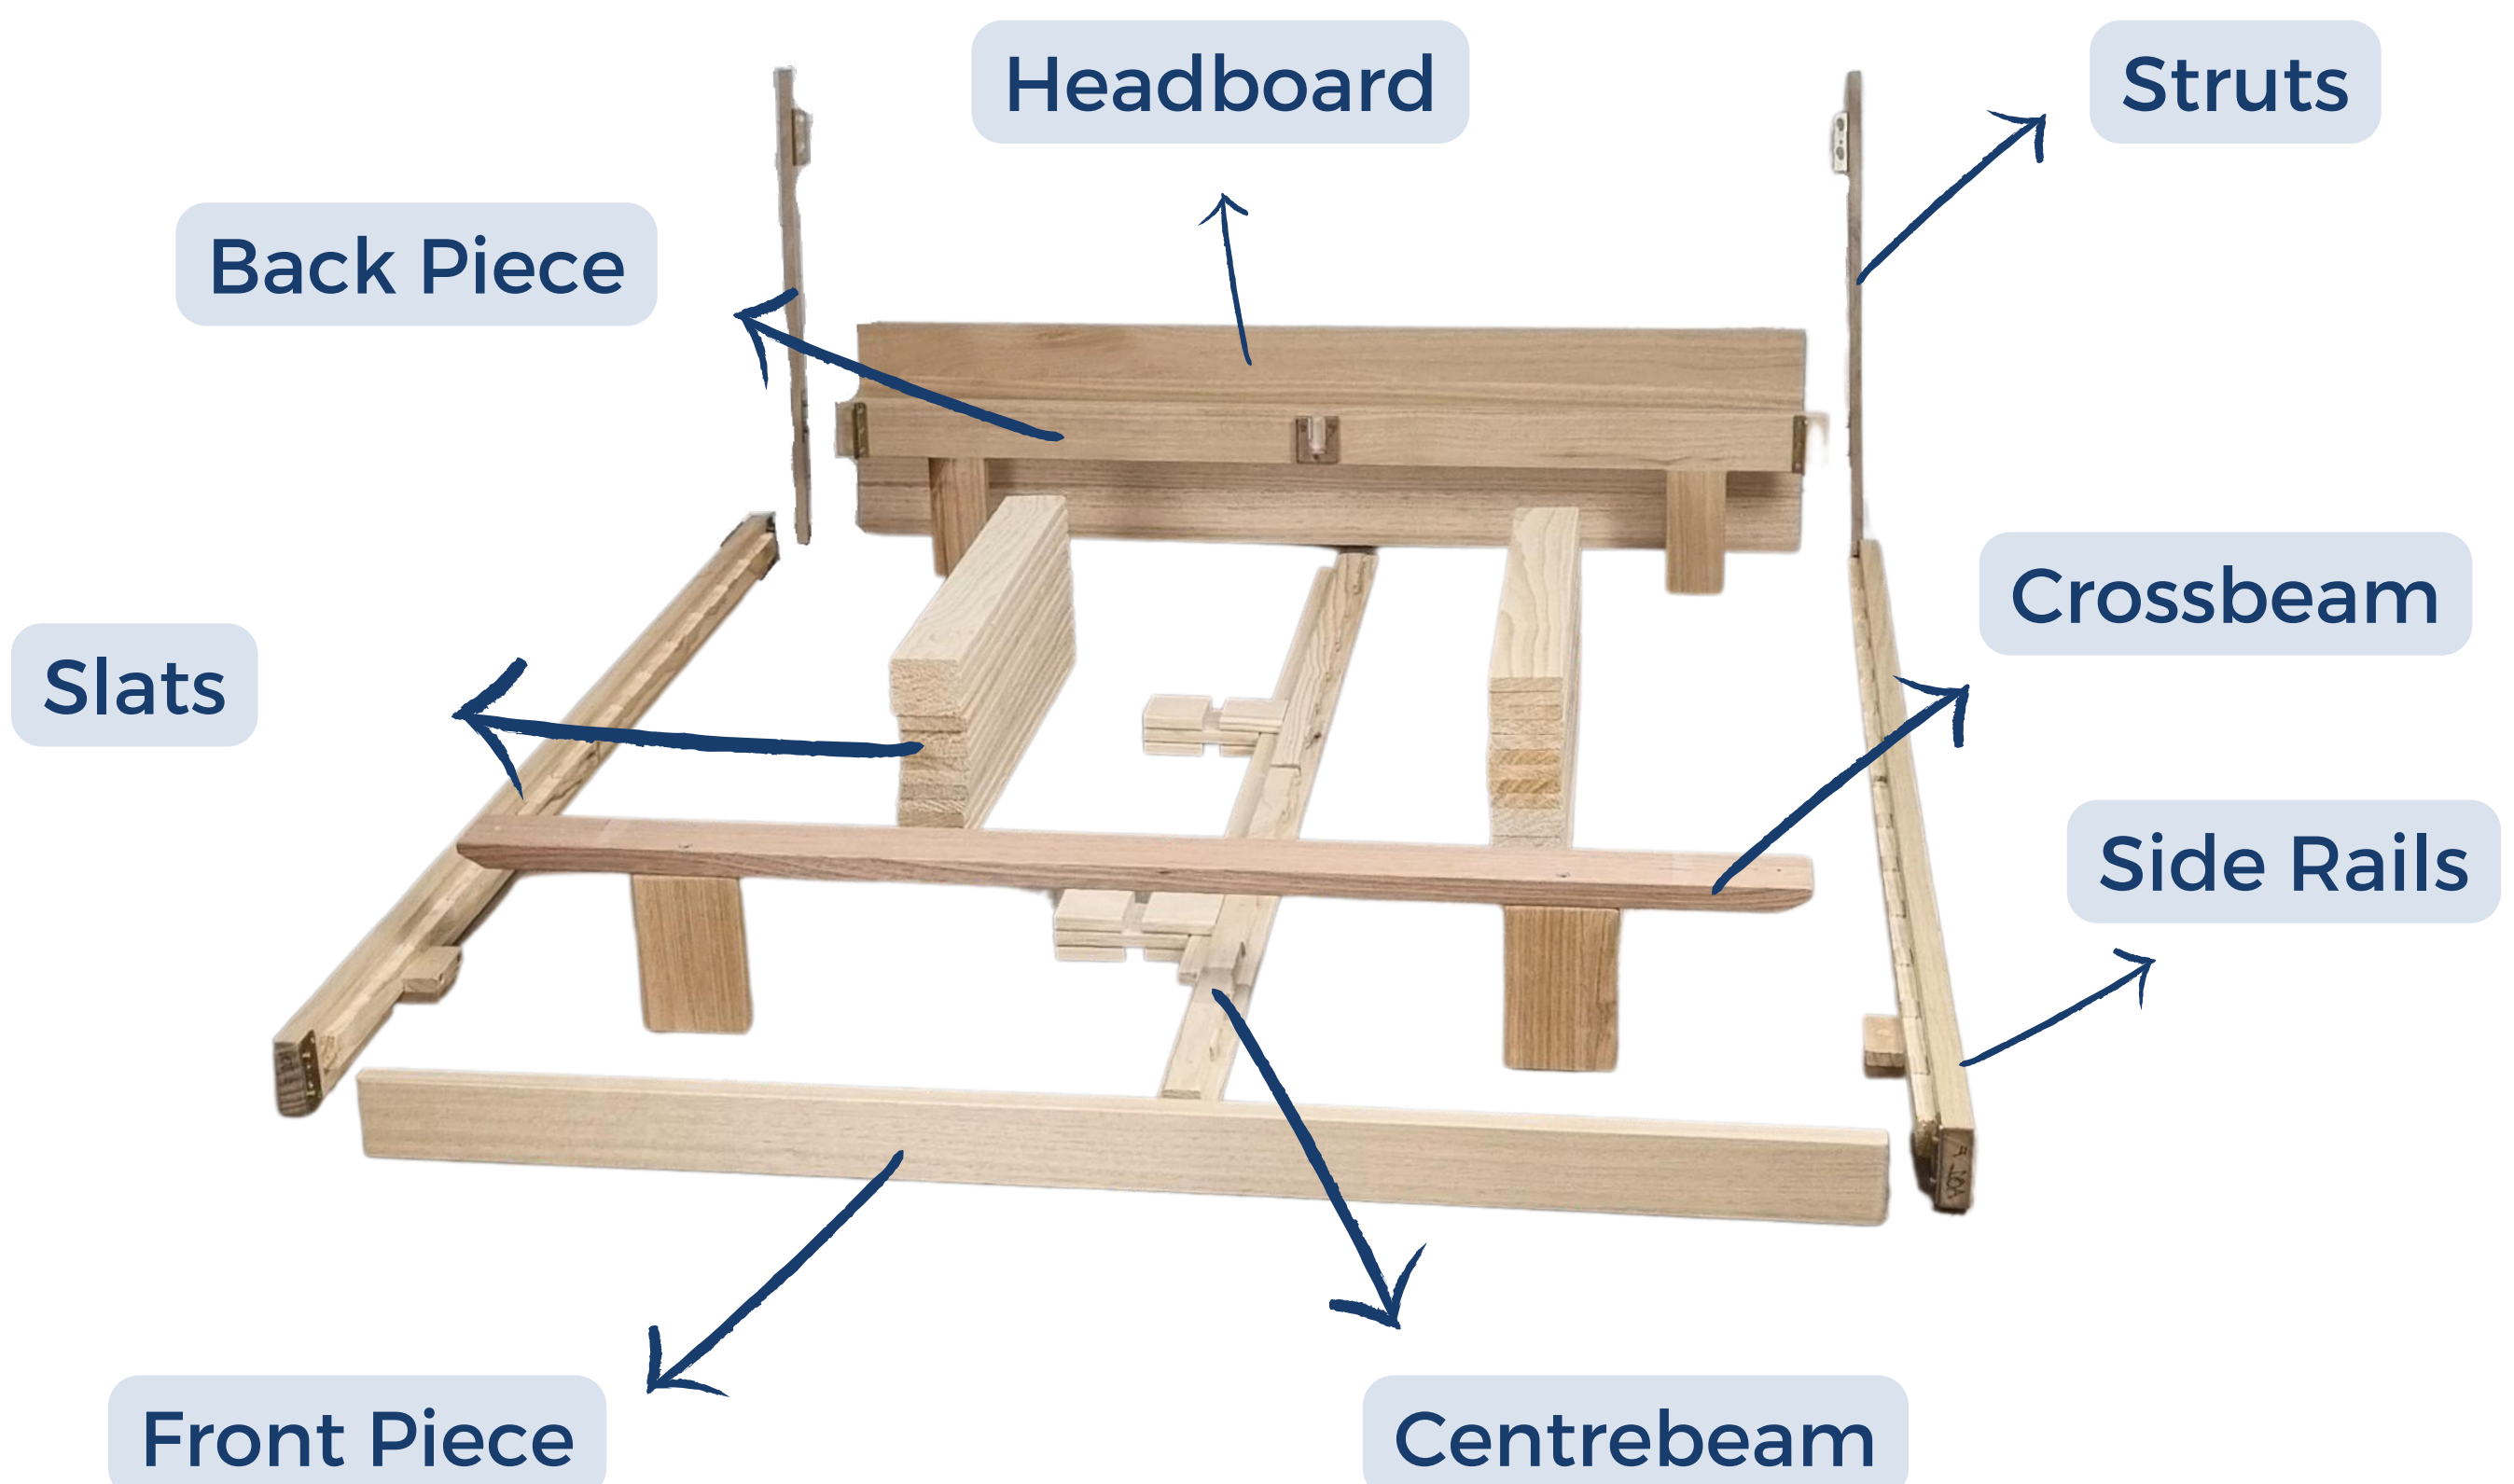


\*Queen size shown here, other sizes are very similar

# Floating Base - Assembly

## Hard Floors Only

To protect hard floors and increase stability, stick the 6 rubber pads onto each leg (1 for each back leg, 2 for each crossbeam leg). Ensure they do not overlap.

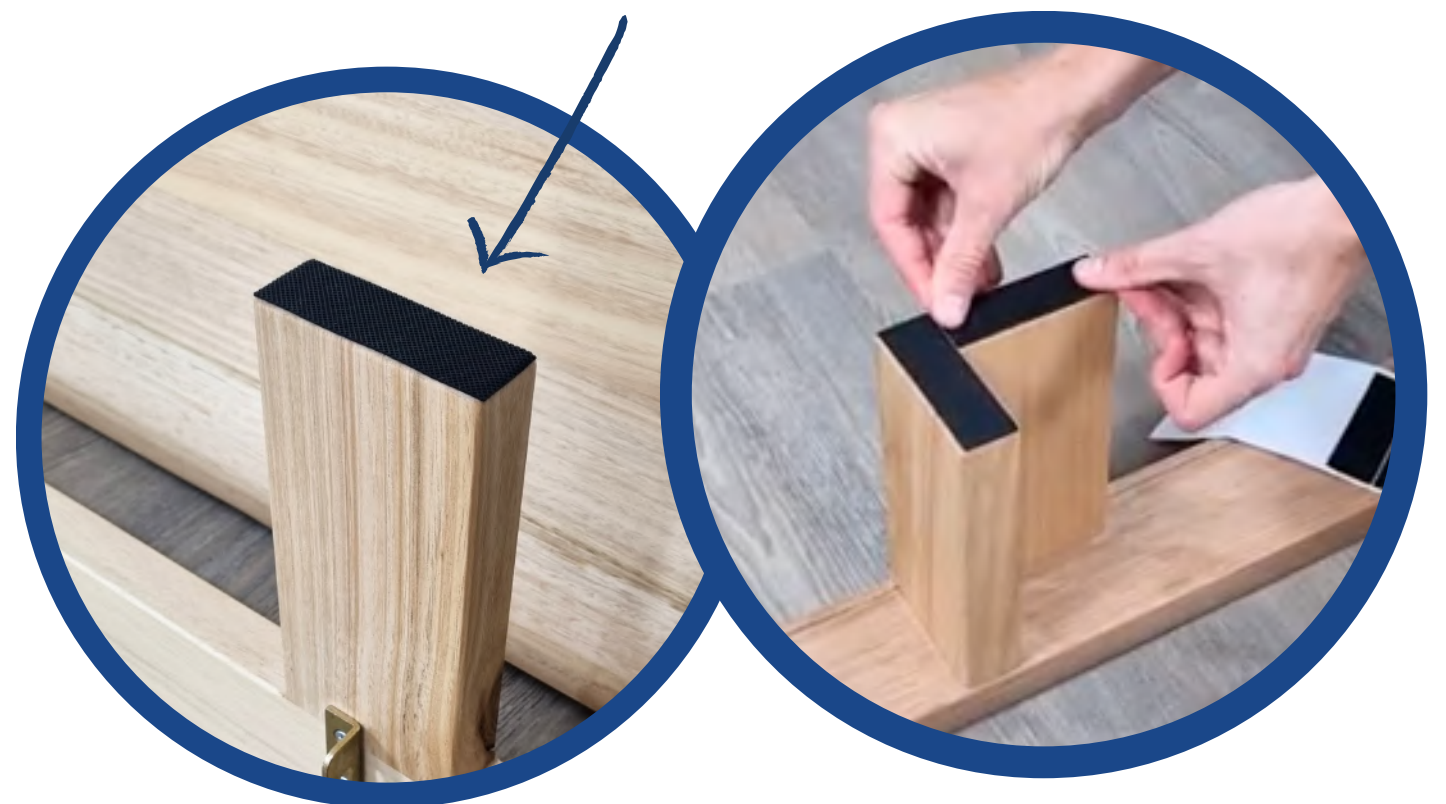

## Step 1: Side rails

Clip both side rails into the back pieces first, using the crossbeam to rest the side rail up off the floor.

Slat recesses should be facing upwards and inwards. Apply force to ensure all brackets are fully seated.

Note: you may notice a small gap on each corner - this is one of our essential design features to stop any potential wood-on-wood squeak!




## Step 2: Front piece

Keeping both side rails resting on the crossbeam, attach the front piece. Yes, the brackets will look “upside down” compared to the others (by design).



## Step 3: Crossbeam

Please place the rubber pads provided underneath your crossbeam before screwing in the large screws fairly tight.

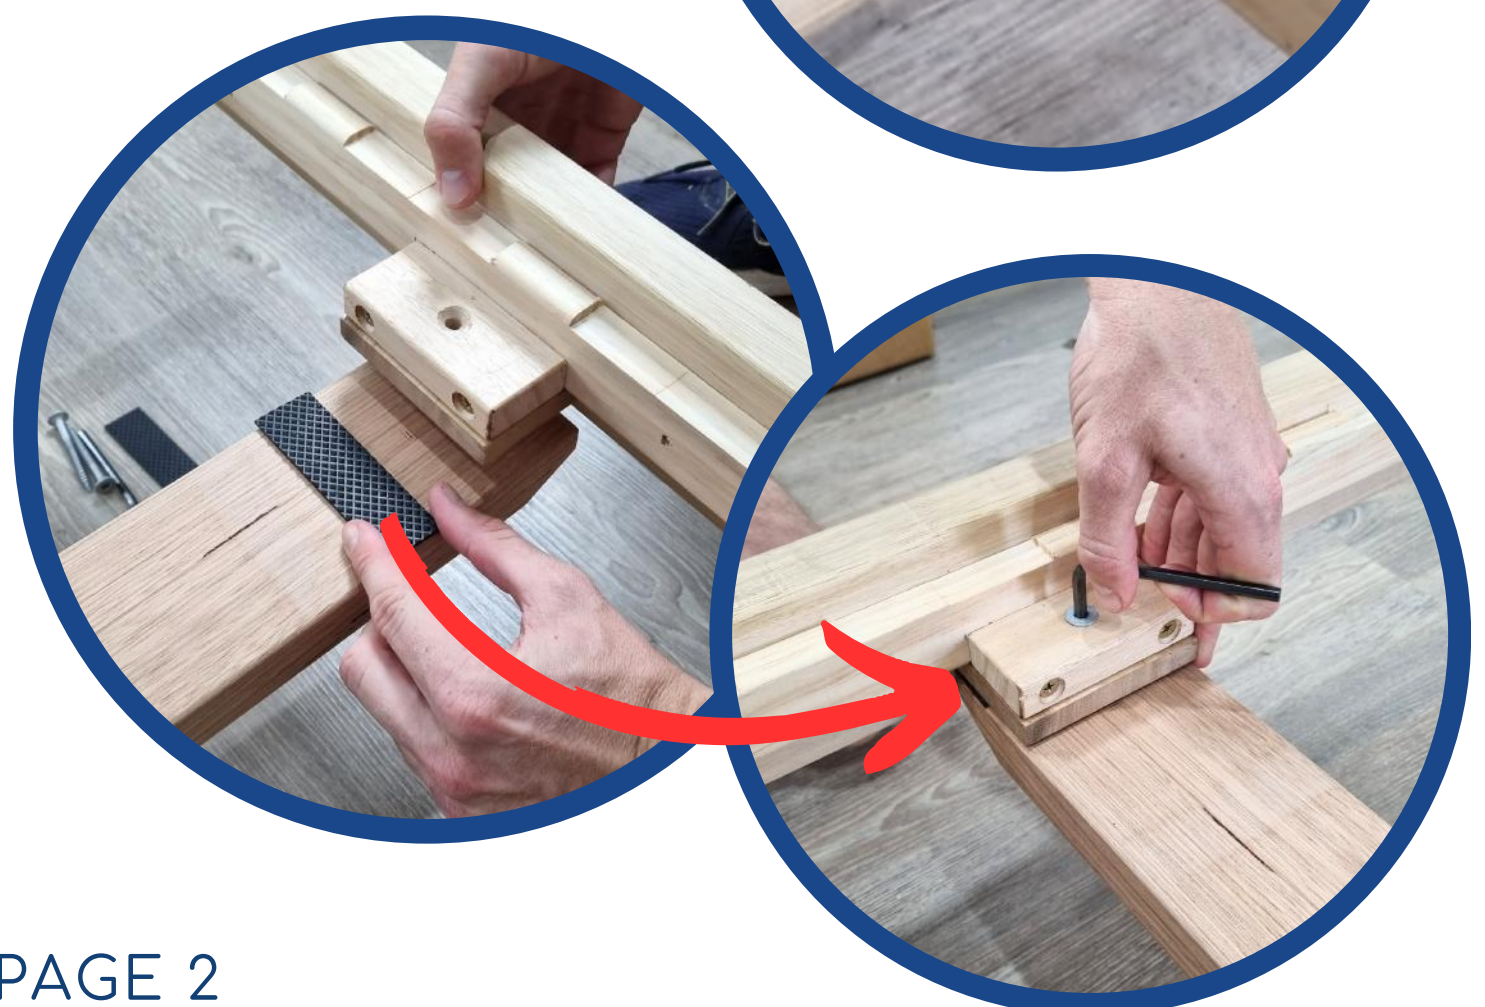



## Recommended: Locking Screws

To enable the bed to be lifted by the side rails and increase stability, install the 4 small screws on each of the 4 base brackets to lock it all together.

## Step 4: Centrebeam

Rest the centrebeam/s in the U-shaped slots. There is an indent on one side of the centrebeam to allow for the crossbeam. Rotate 180 degrees if it does not sit in both slots.



**With one hand pressing down on top of the centrebeam**, wind the leg/s down until they are **firmly** on the floor. On carpet, it should be very firmly down.

Headboard - Refer to additional instructions slip now

## Step 5: Slats

Place the slats in their grooves (they are designed to fit 'loose' to prevent squeaking).

You may also like to ensure the base is "square" by shuffling the front beam slightly left or right.



And that's it! Happy sleeping :)

*We're here to help! Any questions, please feel free to get in touch via live chat, email or phone.*



We won't sleep happy until you do

Feel free to get in touch with any questions or concerns, we'd be happy to help!

Start a live chat on the website, email us, or call us on 0455 737 177 and we'll get back to you as soon as possible.

Happy sleeping!

## Warranty and Care

- Lifetime warranty against any break/squeak, including all delivery fees for 2 years. After this, only delivery/callout fees apply.
- The natural finish can be cleaned with a damp cloth and mild soap if required.
- Knots, grains and blemishes are a natural feature of solid Australian timber, it does not impact the strength or durability of the base. We do our best to minimise timber wastage as much as possible, so it's not uncommon to have some colour variations on your base.
- We use a natural vegetable-based oil to prolong the life of the timber, so refinishing it isn't necessary, but can be done every 2-5 years if discolouration occurs (e.g. prolonged exposure to direct sunlight).
- Do not raise the base on a platform, the Centre beam legs must be securely touching the floor.
- Tip: When disassembling, if a bracket is stuck, use a slat to firmly tap upwards to loosen it.



@ Quokka Beds



@quokkabeds



[productreview.com.au/b/quokka-beds](https://productreview.com.au/b/quokka-beds)